



VoIP Network Assessment Report

<i>Prepared for:</i>	Polycom
<i>Prepared by:</i>	Kelly Daniels
<i>Prepared on:</i>	2007-03-13 20:18

CONTENTS

Executive Summary	1
Testing Overview	2
Readiness Summary	3
kdlan1 Testing Results	4
kdwan_icmp Testing Results	13
kdwan_udp Testing Results	14

Executive Summary

A VoIP assessment has been completed for your network. Using advanced network analysis techniques, the voice quality (MOS) on each of the targets has been measured as well as determining predictive best and worst case voice quality.

In addition to predicting voice quality, the assessment testing has identified any network performance issues that exist that may affect voice quality and other performance critical demands on the network such as backups and video.

60% of the **other voice** targets tested were found not to be ready for voice traffic.


Testing to **10%** of the targets failed or provided indeterminate results. It is recommended that this be investigated as it may indicate network problems or an incorrect testing configuration.



Testing Overview

Assessment Test Started: 2007-03-12 00:20:54
Assessment Test Completed: 2007-03-12 04:03:18
Voice Assessment Name: Voice Assessment 2
Testing Performed By: Kelly Daniels
Number of Concurrent Calls for Voice Trunks: 20

Targets Tested by Type

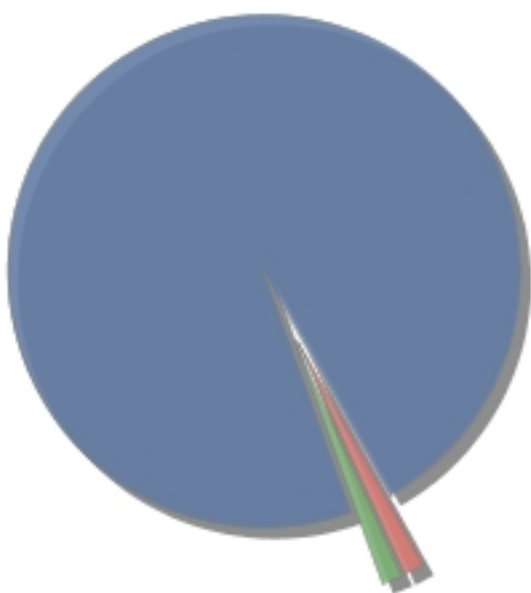


kdlan1	75	97.4%
kdwan_icmp	1	1.3%
kdwan_udp	1	1.3%
Total:	77	100.0%

The following ranges have been used, based on ITU G. 107.


MOS	Quality	Meaning	Color
Good	4.0 - 5.0	Most or all users satisfied or very satisfied	Green
Acceptable	3.6 - 3.99	Some users satisfied	Yellow
Poor	1.0 - 3.59	Many or all users dissatisfied	Red

Readiness Summary

The following chart summarizes the Voice readiness for the Voice targets tested.

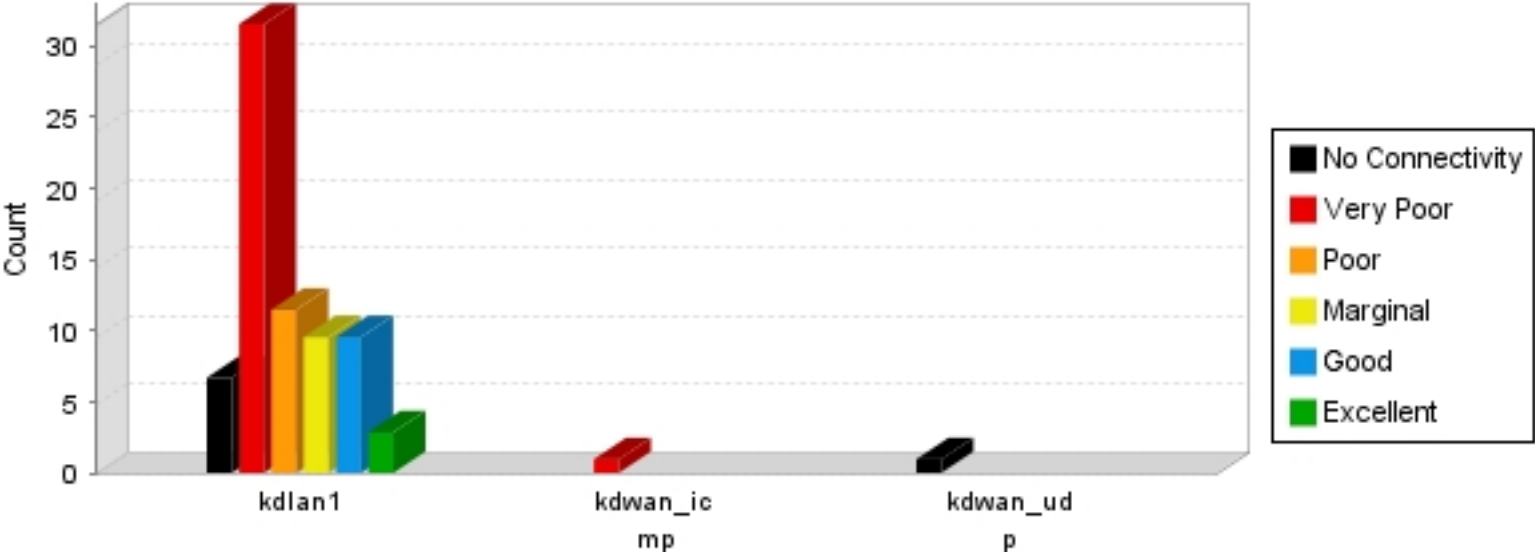

The following chart summarizes the Data readiness for all targets tested.

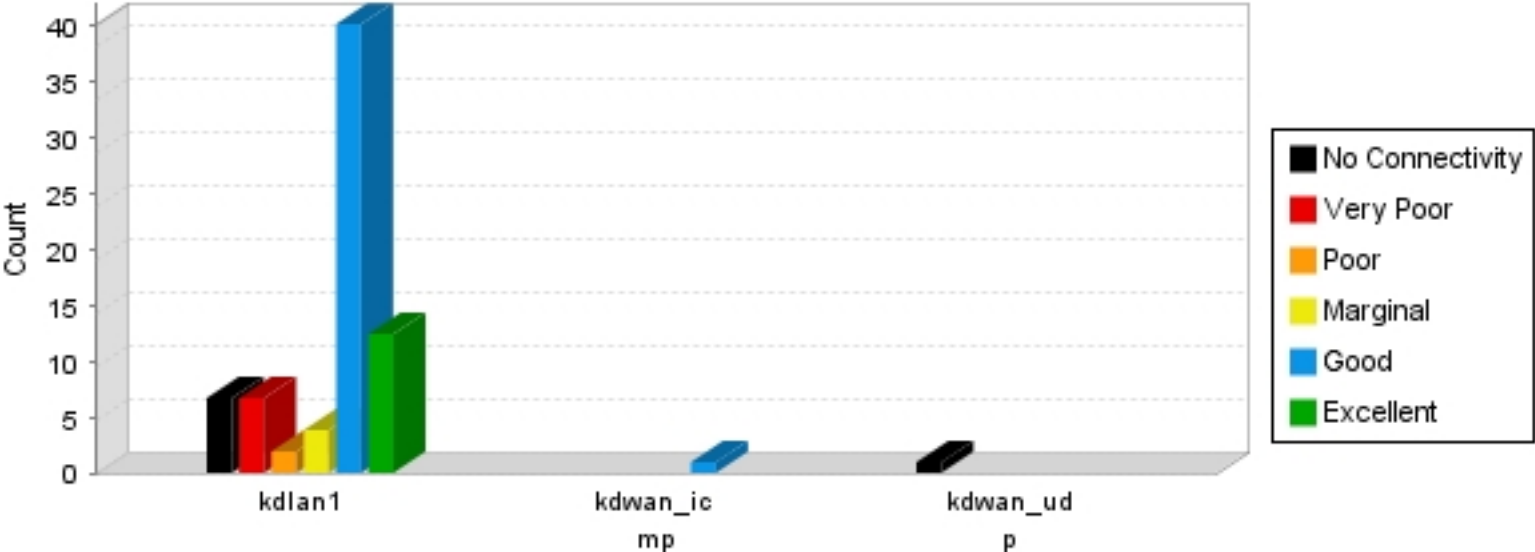


kdlan1 Testing Results

The following summarizes details of the kdlan1 testing parameters.

Codec: G.711 with a maximum MOS value of 4.4 at approximately 64 kbps
 QoS: Not Tested

The following chart shows the Voice readiness for the kdlan1s tested.

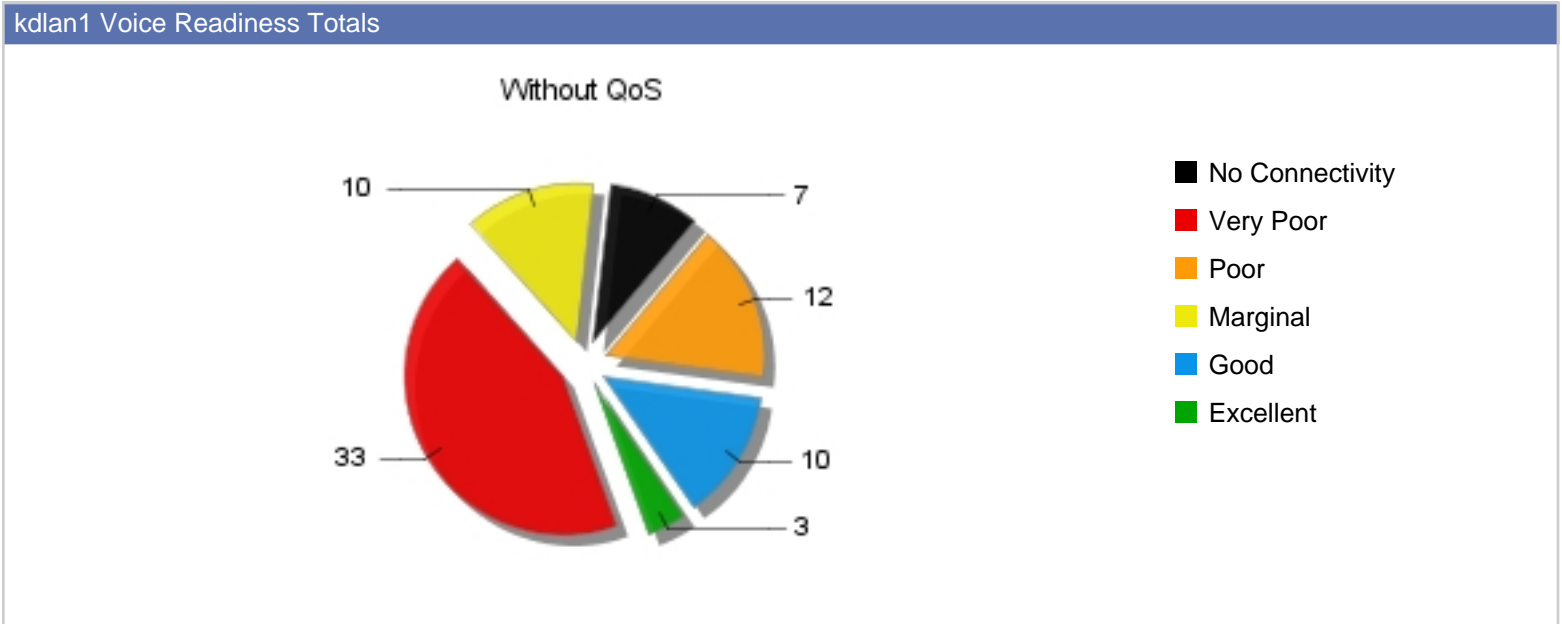

The following targets have been tested for voice readiness and quality. Click on the Target address to drill down to detailed test results.

Target	QoS	Readiness		MOS			Measurements				
		Voice	Data	Best	Measured	Worst	BW Mb 2-way	Loss %	Prop. Delay (ms)	Jitter (Avg/Max, 1 way ms)	Util %
70.70.184.114 S01060050bf784fc3.vw.shawcable.net - Interphase...	Off	↓	↓	4.3	4.3	1.0	1	0	5.63	4.97 / 30.1	50.6
70.70.184.161 S0106000f3d5d14cb.vw.shawcable.net - Interphase...	Off	↓	↓	4.3	4.2	1.0	1	< 1	4.56	3.69 / 35.6	31.4

Target	QoS	Readiness		MOS			Measurements				
		Voice	Data	Best	Measured	Worst	BW Mb 2-way	Loss %	Prop. Delay (ms)	Jitter (Avg/Max, 1 way ms)	Util %
70.70.184.196 S01060050bf3a5111.vw.shawcable.net - Interphase...	Off			4.3	4.0	1.0	1	0	5.60	5.73 / 64.7	52.8
70.70.184.198 S010600032f2df4f8.vw.shawcable.net - Interphase...	Off			4.3	3.7	1.0	1	0	5.19	8.74 / 92.1	45.6
70.70.184.236 S01060040f4c33fef.vw.shawcable.net - Interphase...	Off			4.3	4.3	1.0	1	0	4.99	2.71 / 14.0	44.9
70.70.184.246 S01060008c7593ddb.vw.shawcable.net - Interphase...	Off			4.3	1.8	1.0	0	10	8.17	62.6 / 233	24.5
70.70.184.247 S010600119505ec67.vw.shawcable.net - Interphase...	Off			4.3	4.3	1.0	1	0	5.19	15.4 / 170	49.3
70.70.184.185 S01060016cb9fa25f.vw.shawcable.net - Interphase...	Off			4.0	2.2	2.1	0	0	7.62	54.1 / 239	24.4
70.70.184.253 S0106001346d2f9cd.vw.shawcable.net - Interphase...	Off			4.2	4.2	2.6	1	0	5.13	3.87 / 41.5	49.5
70.70.184.148 S010600179a2109cf.vw.shawcable.net - Interphase...	Off			2.9	2.7	2.6	1	11	5.24	22.8 / 467	46.8
70.70.184.225 S0106001346ed8bc5.vw.shawcable.net - Interphase...	Off			3.8	2.9	2.4	1	17	4.96	3.00 / 28.5	47.3
70.70.184.111 S01060080c800b56f.vw.shawcable.net - Interphase...	Off			4.2	4.2	2.7	1	0	5.09	3.60 / 53.5	48.8

Target	QoS	Readiness		MOS			Measurements				
		Voice	Data	Best	Measured	Worst	BW Mb 2-way	Loss %	Prop. Delay (ms)	Jitter (Avg/Max, 1 way ms)	Util %
70.70.184.169 S010600134645997f.vw.shawcable.net - Interphase...	Off			4.3	4.3	2.7	1	0	5.58	3.92 / 21.6	31.3
70.70.184.170 S01060050ba7653d8.vw.shawcable.net - Interphase...	Off			4.3	4.3	2.7	1	0	5.11	3.54 / 28.5	50.0
70.70.184.173 S0106004005bdaac8.vw.shawcable.net - Interphase...	Off			3.6	3.0	2.5	1	0	5.02	23.3 / 187	52.1
70.70.184.187 S0106001346ee701f.vw.shawcable.net - Interphase...	Off			3.7	3.5	2.6	1	1	5.05	18.4 / 300	45.1
70.70.184.191 S0106004005285b95.vw.shawcable.net - Interphase...	Off			4.3	4.3	2.8	1	0	5.26	3.86 / 9.29	47.0
70.70.184.20 S01060011950b316d.vw.shawcable.net - Interphase...	Off			3.9	2.9	2.9	1	0	6.19	19.6 / 116	61.3
70.70.184.204 S010600047644e8a1.vw.shawcable.net - Interphase...	Off			3.5	2.7	2.7	1	0	5.60	22.1 / 139	57.2
70.70.184.21 S010600119538650e.vw.shawcable.net - Interphase...	Off			3.5	2.7	2.7	0	0	6.15	21.8 / 138	36.4
70.70.184.238 S01060013460a35db.vw.shawcable.net - Interphase...	Off			3.8	3.8	2.9	1	0	4.92	9.98 / 194	48.0
70.70.184.241 S0106000795b77573.vw.shawcable.net - Interphase...	Off			4.3	4.3	2.6	1	0	4.90	4.10 / 21.8	52.2

Target	QoS	Readiness		MOS			Measurements				
		Voice	Data	Best	Measured	Worst	BW Mb 2-way	Loss %	Prop. Delay (ms)	Jitter (Avg/Max, 1 way ms)	Util %
70.70.184.251 S010600179a261a83.vw.shawcable.net - Interphase...	Off			4.2	4.2	2.5	1	< 1	4.73	3.45 / 47.3	47.1
70.70.184.36 S01060050180a07f5.vw.shawcable.net - Interphase...	Off			3.9	3.9	2.2	1	0	5.64	7.15 / 72.5	50.1
70.70.184.4 S0106000c6ef9a211.vw.shawcable.net - Interphase...	Off			3.9	2.8	2.8	1	< 1	5.55	27.7 / 121	57.1
70.70.184.51 S0106001346fb22b7.vw.shawcable.net - Interphase...	Off			3.7	3.6	2.7	1	0	5.14	9.81 / 109	53.6
70.70.184.87 S01060011d8055916.vw.shawcable.net - Interphase...	Off			4.0	4.0	2.6	1	0	5.59	9.88 / 124	53.3
70.70.184.109 S0106000c6ec7fd6e.vw.shawcable.net - Interphase...	Off			4.3	4.3	2.9	1	0	5.20	3.06 / 24.0	35.4
70.70.184.143 S0106001346b7346b.vw.shawcable.net - Interphase...	Off			4.3	4.3	2.8	1	0	5.33	2.93 / 33.6	38.8
70.70.184.207 S0106001346b8a641.vw.shawcable.net - Interphase...	Off			3.3	2.3	2.3	0	0	9.43	39.7 / 161	19.9
70.70.184.221 S010600036d105f7e.vw.shawcable.net - Interphase...	Off			4.3	4.3	2.8	1	0	4.84	3.75 / 28.2	41.0
70.70.184.24 S0106001451a6da2c.vw.shawcable.net - Interphase...	Off			4.1	4.1	2.4	0	0	4.97	6.31 / 53.9	46.3

Target	QoS	Readiness		MOS			Measurements				
		Voice	Data	Best	Measured	Worst	BW Mb 2-way	Loss %	Prop. Delay (ms)	Jitter (Avg/Max, 1 way ms)	Util %
70.70.184.242 S0106000f3d640767.vw.shawcable.net - Interphase...	Off			4.2	2.5	2.5	0	0	8.24	34.7 / 147	23.3
70.70.184.112 S01060080c8238012.vw.shawcable.net - Interphase...	Off			3.6	3.0	3.0	1	0	5.51	19.2 / 153	50.3
70.70.184.162 S0106000d88c2f3d6.vw.shawcable.net - Interphase...	Off			4.0	4.0	3.1	1	0	5.03	5.74 / 147	43.0
70.70.184.107 S01060050f2cb5b11.vw.shawcable.net - Interphase...	Off			4.0	3.7	3.2	1	0	5.66	8.85 / 90.8	56.7
70.70.184.153 S01060015e9e9facd.vw.shawcable.net - Interphase...	Off			3.9	3.1	3.1	1	0	5.59	35.1 / 292	53.7
70.70.184.159 S010600115bfc8e80.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.2	1	0	5.14	4.91 / 25.5	48.0
70.70.184.180 S01060004e238e1d5.vw.shawcable.net - Interphase...	Off			3.9	3.4	2.9	1	10	5.63	5.40 / 32.6	58.0
70.70.184.233 S0106000476ce5c65.vw.shawcable.net - Interphase...	Off			3.7	3.6	3.1	1	0	4.83	11.0 / 96.6	53.9
70.70.184.32 S010600032f09c618.vw.shawcable.net - Interphase...	Off			3.7	3.0	3.0	1	0	5.65	18.5 / 144	56.6
70.70.184.52 S01060010c603a247.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.0	1	0	5.45	4.95 / 28.6	45.9

Target	QoS	Readiness		MOS			Measurements				
		Voice	Data	Best	Measured	Worst	BW Mb 2-way	Loss %	Prop. Delay (ms)	Jitter (Avg/Max, 1 way ms)	Util %
70.70.184.133 S01060015e9772845.vw.shawcable.net - Interphase...	Off			4.0	4.0	3.2	1	0	5.13	5.61 / 63.0	43.6
70.70.184.249 S0106005004057912.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.1	1	0	4.86	2.76 / 28.3	30.8
70.70.184.6 S0106000f3d5d131f.vw.shawcable.net - Interphase...	Off			3.9	3.1	3.1	0	< 1	5.71	16.4 / 142	42.7
70.70.184.125 S01060008741f1ebc.vw.shawcable.net - Interphase...	Off			4.2	4.2	3.3	0	0	5.37	6.58 / 43.3	39.3
70.70.184.160 S010600112513ab8c.vw.shawcable.net - Interphase...	Off			4.1	4.1	3.4	1	0	5.48	4.78 / 79.8	46.6
70.70.184.167 S0106000d88bf7a80.vw.shawcable.net - Interphase...	Off			4.2	4.2	3.5	1	0	5.04	3.16 / 44.4	49.0
70.70.184.193 S0106000874c2378b.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.6	1	0	5.24	4.02 / 19.3	49.7
70.70.184.217 S0106000d880365bd.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.4	1	0	5.15	2.75 / 39.1	56.3
70.70.184.232 S0106000ae662023b.vw.shawcable.net - Interphase...	Off			3.7	3.7	3.4	1	0	5.18	8.81 / 95.1	57.0
70.70.184.27 S010600c049ee770b.vw.shawcable.net - Interphase...	Off			3.6	3.5	3.5	1	0	5.12	9.47 / 112	48.8

Target	QoS	Readiness		MOS			Measurements				
		Voice	Data	Best	Measured	Worst	BW Mb 2-way	Loss %	Prop. Delay (ms)	Jitter (Avg/Max, 1 way ms)	Util %
70.70.184.199 S01060080c6f0a6c5.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.4	1	0	5.17	2.09 / 20.2	37.1
70.70.184.208 S01060013460a9cf5.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.6	0	0	4.94	3.20 / 12.4	36.3
70.70.184.46 S010600119576ab21.vw.shawcable.net - Interphase...	Off			4.1	3.5	3.5	0	0	5.06	10.2 / 83.1	35.8
70.70.184.157 S01060011950bf7ad.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.8	1	0	5.36	4.57 / 17.6	50.8
70.70.184.163 S01060011d84e7dc1.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.7	1	0	4.90	4.37 / 22.2	62.0
70.70.184.165 S010600024404475a.vw.shawcable.net - Interphase...	Off			4.1	4.1	3.7	1	0	5.26	10.6 / 117	53.0
70.70.184.186 S0106001346cab081.vw.shawcable.net - Interphase...	Off			4.2	4.2	3.8	1	0	5.72	4.18 / 61.6	54.6
70.70.184.2 S0106000c6ec625f7.vw.shawcable.net - Interphase...	Off			4.0	3.8	3.8	1	0	5.10	8.61 / 91.9	62.0
70.70.184.213 S010600112554c38f.vw.shawcable.net - Interphase...	Off			3.9	3.7	3.7	1	< 1	5.11	10.0 / 83.8	46.8
70.70.184.33 S0106002078c65f73.vw.shawcable.net - Interphase...	Off			3.9	3.6	3.6	1	0	5.25	10.5 / 79.1	57.5

Target	QoS	Readiness		MOS			Measurements				
		Voice	Data	Best	Measured	Worst	BW Mb 2-way	Loss %	Prop. Delay (ms)	Jitter (Avg/Max, 1 way ms)	Util %
70.70.184.45 S010600179a27c1b7.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.8	1	0	5.15	4.46 / 12.1	49.9
70.70.184.47 S0106001217fa0707.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.8	1	0	5.54	6.55 / 22.5	59.5
70.70.184.50 S0106004005486bc8.vw.shawcable.net - Interphase...	Off			4.3	4.3	3.8	0	0	5.17	4.17 / 18.9	47.6
70.70.184.235 S0106001346ee58c3.vw.shawcable.net - Interphase...	Off			4.3	4.3	4.0	1	0	5.04	4.44 / 30.8	46.4
70.70.184.28 S0106001346461dbd.vw.shawcable.net - Interphase...	Off			4.3	4.3	4.0	1	0	4.94	6.58 / 40.3	50.2
70.70.184.1 70.70.184.1 - Interphase Corporation	Off			4.1	4.1	4.1	1	0	2.25	2.74 / 75.1	42.2

Incomplete kdlan1 Testing Results

Testing was not completed to the following kdlan1s.

Target	Reason
70.70.184.55 (S0106000347d69f31.vw.shawcable.net - Interphase...)	Could not connect to target
70.70.184.136 (S01060080c6fd2879.vw.shawcable.net - Interphase...)	Could not connect to target
70.70.184.156 (S01060011434da483.vw.shawcable.net - Dell Inc.)	Could not connect to target
70.70.184.174 (S010600e029965c4e.vw.shawcable.net - Interphase...)	Could not connect to target
70.70.184.226 (S0106001150d3e5df.vw.shawcable.net - Interphase...)	Could not connect to target
70.70.184.230 (S010600e04ceb2088.vw.shawcable.net)	Could not connect to target

Testing was not completed to the following kdlan1s.


Target	Reason
- Interphase...)	
70.70.184.124 (S010600c049aa675c.vw.shawcable.net - Interphase...)	Could not connect to target

kdwan_icmp Testing Results

The following summarizes details of the kdwan_icmp testing parameters.

Codec: G.711 with a maximum MOS value of 4.4 at approximately 64 kbps
 QoS: Not Tested

The following chart shows the Voice readiness for the kdwan_icmps tested.

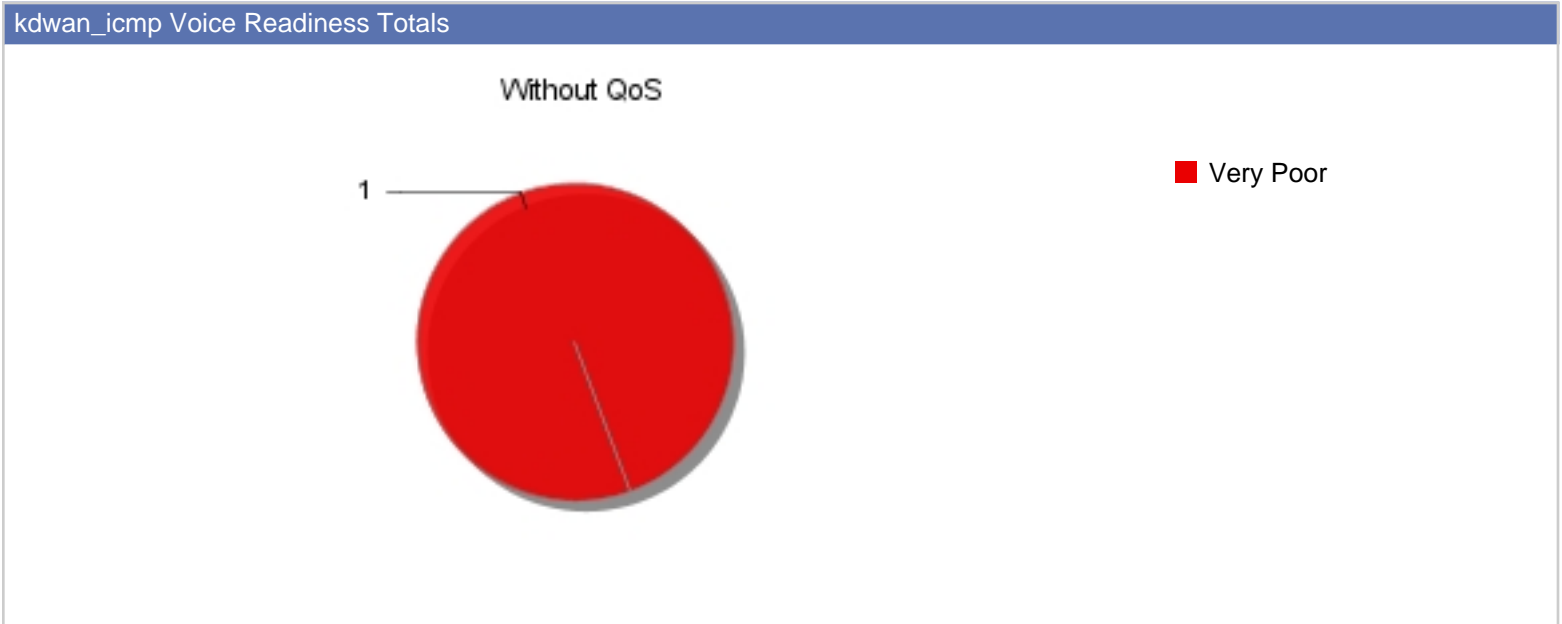

The following targets have been tested for voice readiness and quality. Click on the Target address to drill down to detailed test results.


Target	QoS	Readiness		MOS			Measurements				
		Voice	Data	Best	Measured	Worst	BW Mb 2-way	Loss %	Prop. Delay (ms)	Jitter (Avg/Max, 1 way ms)	Util %
polycom.apparentnetworks.net icmp_test	Off	↓	↗	3.7	2.6	2.5	1	19	3.11	694 / 1.10E3	23.5

kdwan_udp Testing Results

The following summarizes details of the kdwan_udp testing parameters.

Codec: G.711 with a maximum MOS value of 4.4 at approximately 64 kbps
QoS: Not Tested

The following chart shows the Voice readiness for the kdwan_udps tested.

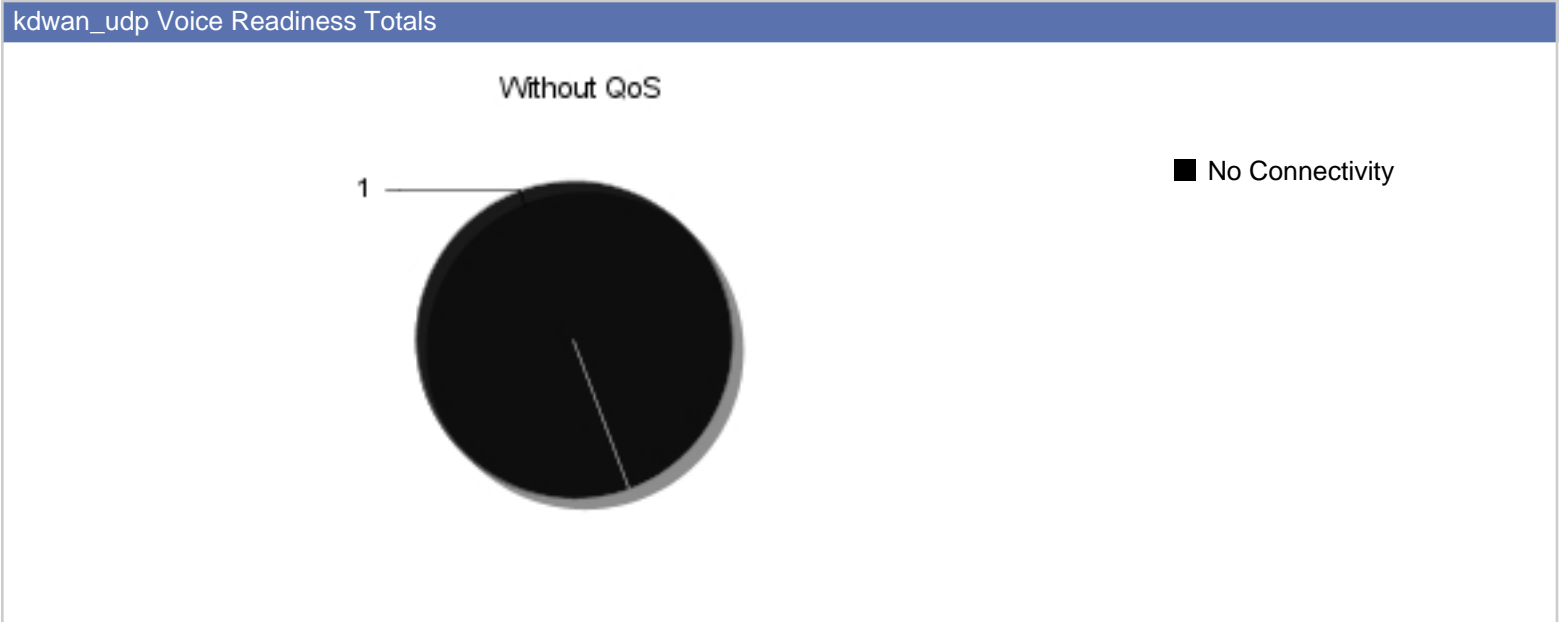

Incomplete kdwan_udp Testing Results

Testing was not completed to the following kdwan_udps.

Target	Reason
polycom.apparentnetworks.net (udp_test)	Could not connect to target